

Lasting Safe

- Company Profile
- Products Catalog



Company Profile



LastingSafe is a leading manufacturer of physical security products in China. Products include safe deposit boxes, vault doors, vault rooms, safe houses, etc. We also provide customized product customization and OEM services, and products are exported to the Americas, Europe, Southeast Asia, the Middle East, etc. More than 40 countries and regions have won unanimous praise from customers.

LastingSafe has a complete and scientific quality management system and first-class production equipment. Through high-quality design, manufacturing and management, we ensure that the safety and reliability of all products meet the requirements.



Safe Deposit Box



LastingSafe safe deposit box is composed of 10mm (stainless steel+ aluminum alloy) door, 0.8mm stainless steel inner boxes, and 1.5mm galvanized steel plates box body.

The color of the door panel and the color of the inner box provide customers with a variety of choices, and can also be customized according to customer needs



While ensuring the security performance and load-bearing of the safe deposit box, through a special structural design, the weight will be reduced by 30% compared with other manufacturers, which can reduce the ground load-bearing requirements and make it easier to transport and install.

The inner box is made of stainless steel, and the bottom is covered with flannel to better protect valuable items. Optional inner box lock and handle.


The lock of the safe deposit box can be selected as an iron key lock, a copper key lock, or an electronic password lock.

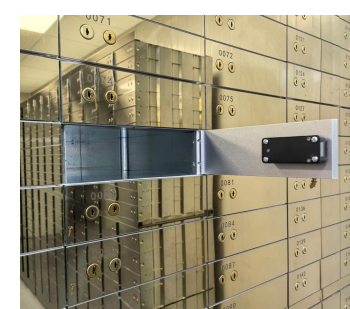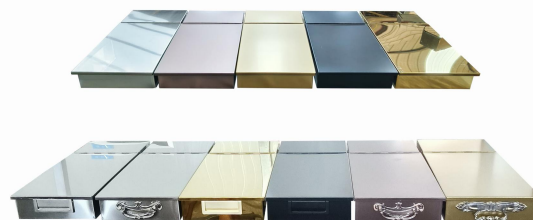


Safe Deposit Box

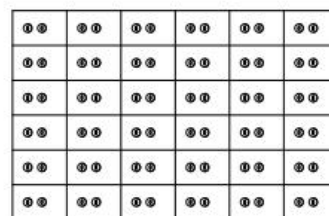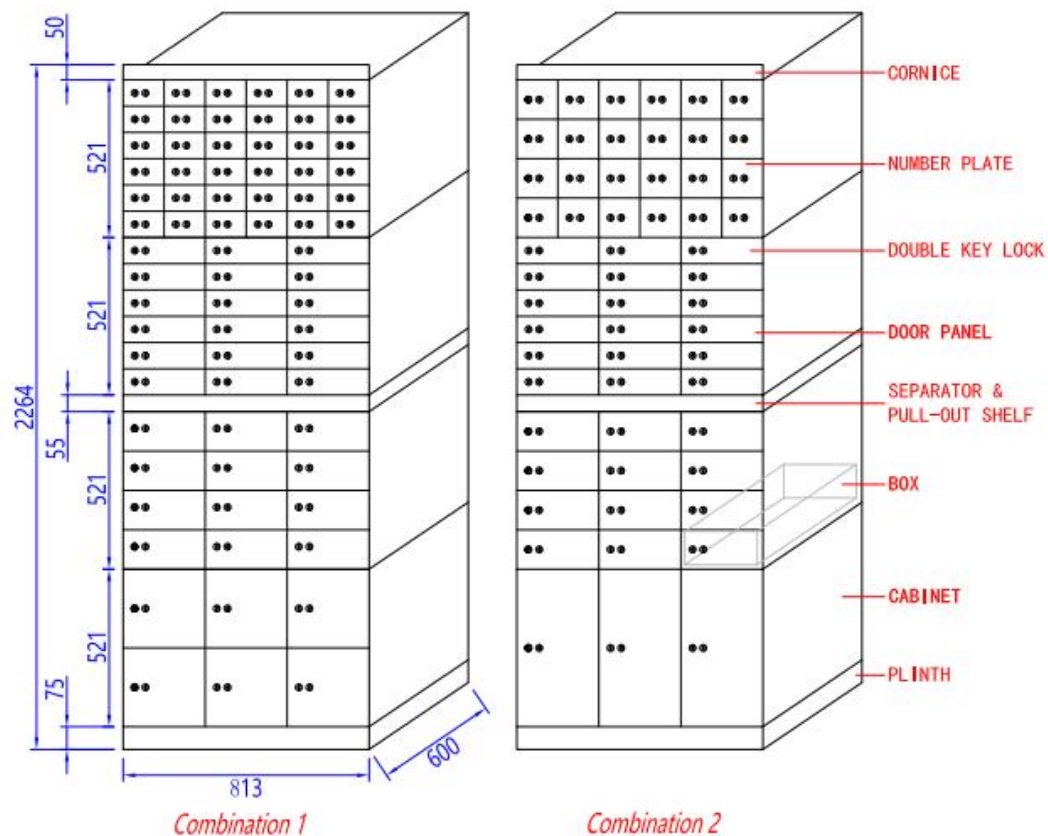


Type :LS36
Size :3"H*5"W
Weight : 136KG

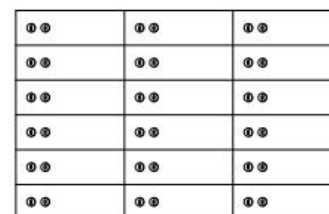


Type :LS18
Size :3"H*10"W
Weight : 104KG

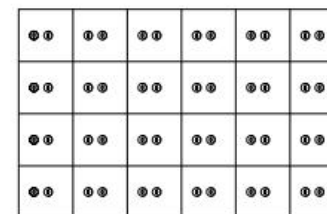


Type :LS24
Size :5"H*5"W
Weight : 114KG

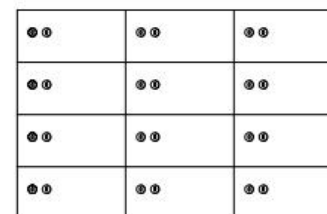


Type :LS12
Size :5"H*10"W
Weight : 86KG

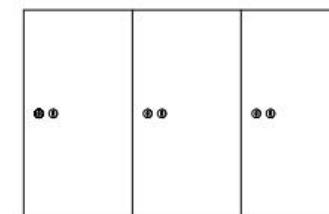

Type :LS03
Size :20"H*10"W
No Box
Weight : 40KG

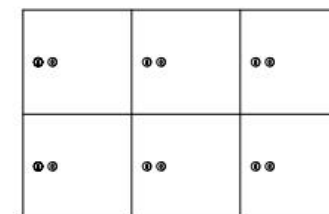

Type :LS06
Size :10"H*10"W
Weight : 68KG

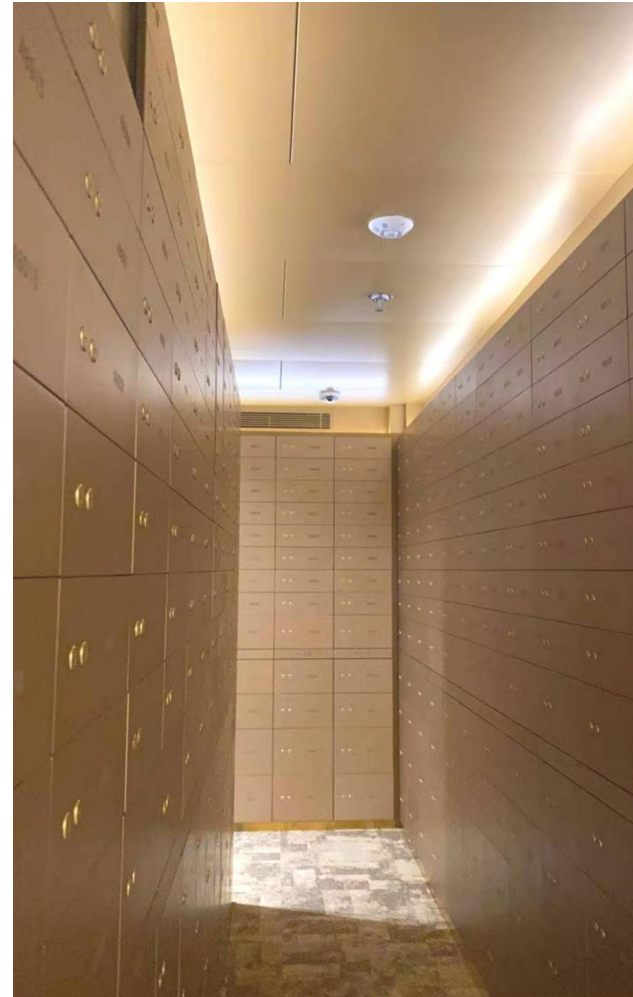

Vault Door

LastingSafe vault door build from advanced technologies to resist to various methods of combined attacks using mechanical and electrical hand tools such as: hammers, crowbars, hand drills, concrete breakers. Oxy cutters such as Oxy-acetylene, thermal lance and oxy-arcs.

Use location and function: Home, banks, museums, military, hotels, insurance companies, or any places storing valuables, which could be cash, gold, relics, guns and ammunition, documents, etc.

Protection Level (Anti-Burglary time)

Class M(15 minutes) , Class 1(30 minutes) , Class 2(60 minutes) , Class 3(120 minutes)

Standard Size(Clear opening size):

Single-leaf door : W 1000mm* H 2000mm


Double-leaf door : W 2000mm* H 2500mm

Surface: Stainless steel / steel spray paint

Vault manufacturing standard:

China GB 37481-2019

United States UL608

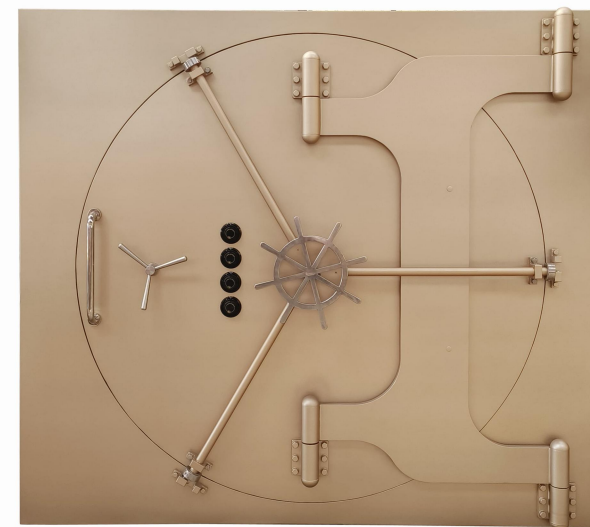

Vault Door

Standard equipment:

Main door,
Door frame,
Day gate,
Handwheel ,
Internal release
2 pcs S&G6731 mechanical combination for main door lock,
1piece key lock for day gate ,

Optinal equipment:

Various locks such as electronic password locks, biometric locks, keylocks, time locks,
Glass re-locking device,
Automatic opening,
Emergency door,
Ventilation vents,
Facial recognition






Modular Vault Room

LastingSafe vault panels adopt modular splicing structure, which is easily installed and disassembled. Generally the vault can be installed in a few days. Furthermore, they can also be disassembled and transferred to another place for re-installation.

Adaptable for most room specifications, even those with space constraints or that are located on upper floors. LastingSafe components are precisely fitted to a detailed floor plan, which have been drawn up by LastingSafe engineers. The size and shape of vault room can be customized according to the actual situation of installation.

LastingSafe modular vault room panels filled with a special composite material, steel mesh, metal fiber, steel bars, concret, etc. There are four levels of protection that can withstand different degrees of physical attacks such as drilling, cutting, oxy cutters etc.

And the vault panel needs to be matched with protection grade of vault doors.

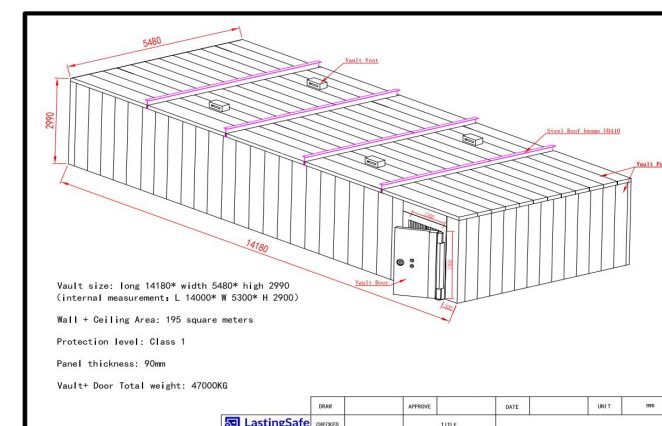

Model	Protection Grade	Thickness (mm)	Weight (KG /m²)	Test Time (Minutes)
LS-MP-M	Class M	60	160	15
LS-MP-1	Class 1	90	232	30
LS-MP-2	Class 2	110	280	60
LS-MP-3	Class 3	150	400	120

